

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

RID PASS-THRU REFRIGERATOR

RID18HC Half-Solid, Half-Glass Door Bottom Mount Refrigerator Hydrocarbon Series

MODEL: RID18HC-HGS



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Full electronic control
- Interior LED light
- · Five (5) shelves standard
- · One piece grille
- · Cartridge style hinges
- 120° Stay-open feature
- · Snap-in magnetic door gaskets
- 3" Heavy duty casters with two brakes standard

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- · Epoxy shelves & clips
- 6" Casters or 6" legs optional
- · Wire shelf dividers
- · Right or left hinged door
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- · Epoxy coated evaporator coil
- Maintains temperature between 36° and 38°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	RID18HC-HGS	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 1/4"	
Depth Overall with Handles	32 %"	
Height Overall	72 %"	
Number of Doors	4	
Depth with Door Open 90°	80 1/8"	
Door Openings (in)	24" x 24 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	18.38	
Internal Width Overall (in)	24 1/4"	
Internal Depth Overall (in)	25 1/8"	
Internal Height Overall (in)	Max 53" Min 46 %"	
Number of Shelves	5	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	5.5	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1997	
Heat Rejection (BTU/Hr)	2995.5	
Charge (lbs/grams/ounce)	0.1875/85/3.0	
SHIPPING DATA		
Gross Weight (crated lbs)	422 lbs	
Height - Crated	75"	
Width - Crated	30"	
Depth - Crated	35"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bottom Mount Pass-Thru Half-Solid Door, Half-Glass Door Model: RID18HC-HGS

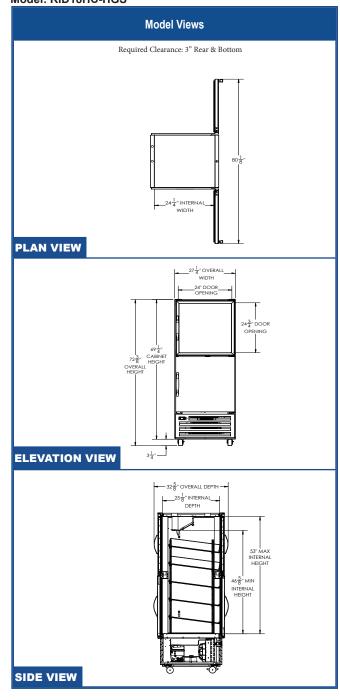



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 10.7' long cord and plug set.