



BEVERAGE-AIR

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

BF200RB BLAST CHILLER: BLAST CHILLING, SHOCK FREEZING AND THAWING

BLAST CHILLING/SHOCK FREEZING/THAWING

BF200RB Solid Door Self-Contained Roll-In Blast Chiller

MODEL:
BF200RB-PFO-XL



Note: Shown With Optional Ramp

5 Year Parts/Labor Warranty Available

5 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior and interior (with rounded interior corners)
- Stainless steel door liner
- Die-formed leak-proof floor
- High density, polyurethane insulation
- Anti-condensation resistance, placed on the door under the gasket
- Hinged door with gasket
- Ergonomic vertical door handle
- Circuit breaker for compressor protection
- 5" High-definition, easy-to-use touch display
- Blast chilling, shock freezing and thawing modes
- Photo identifiable mode settings
- Customized blast chilling, blast freezing and thawing cycles (320 cycles can be memorized)
- USB connection for uploading and downloading data and recipes
- Heated core probe, with 4 measuring points
- Pre-cooling function
- Thick stainless steel internal bumper to avoid damage caused by the cart
- Maximum interior dimensions for carts: 35"W x 40"D x 71"H (not included)
- Ramp dimension: 43.2"W x 31.9"D (ramp not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Single sensor probe
- Ramp (not included)

REFRIGERATION SYSTEM

- Self-contained refrigeration system uses R404 refrigerant to comply with all environmental concerns
- Copper-aluminum evaporator with anti-corrosion treatment
- High-ventilation evaporator to ensure the highest efficiency of the cooling system
- Evaporator installed on the back with accessible cover and adjustment of the speed of the evaporator fans



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com




BEVERAGE-AIR®

MODEL	BF200RB-PFO-XL
EXTERNAL DIMENSIONAL DATA	
Width Overall (in)	43.31"
Depth Overall (in)	64.26"
Height Overall (in)	94.49"
Number of Doors	1
Depth, Door Opening 90° (in)	104.46"
Door Opening (in)	35.43" x 71.65"
PERFORMANCE DATA	
Chilling Capacity In 90 Min	187 lbs
Freezing Capacity In 240 Min	88 lbs
Climate Class	4
Carts (not included)	1 GN2/1
ELECTRICAL DATA	
Cabinet Voltage	208-240/60/3
Total Amperes	23.8
NEMA Plug (8' cord)	15-30P
REFRIGERATION DATA	
Condensing Unit Size, HP	2.8
Refrigerant	R404
Capacity (BTU/Hr) (113°F/-13°F)	10,857
Heat Rejection (W) (14°F/95°F)	9,850
Refrigerant Amount (lbs)	6.4
WEIGHT DATA	
Gross Weight - Crated	1570 lbs
Height - Crated	102"
Width - Crated	50"
Depth - Crated	70"


Self-Contained Blast Chilling, Shock Freezing and Thawing Model: BF200RB-PFO-XL

Model Views


12" Top and 3" rear clearance is required



PLAN VIEW

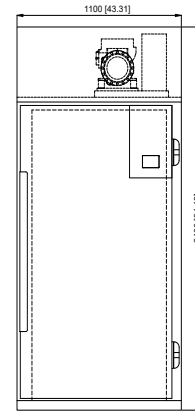

ELEVATION VIEW

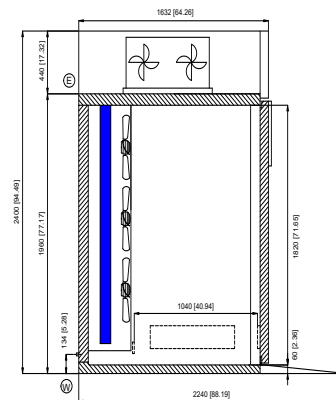

SIDE VIEW

