



BEVERAGE-AIR

| | |
|-----------------|------|
| Project: _____ | AIA# |
| Item: _____ | |
| Location: _____ | SIS# |
| Approved: _____ | |

REMOTE BLAST CHILLER

BF402DP Solid Door Roll-In Blast Chiller

**MODEL:
BF402DP-1P**



Note: Shown With Optional Ramp

**5 Year Parts/Labor Warranty Available
5 Year Compressor Warranty**

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Die-formed interior floor has rounded corners
- Central drain for easy cleaning
- Anti-condensation perimeter heating around door opening
- Ergonomic door handle and stainless steel
- Snap in place magnetic gaskets self closing door with hold open stop at 100°
- Soft and hard, timed or core probe blast chilling
- Soft and hard, timed or core probe shock freezing
- Automatic recognition of core probe
- Multi point sensor temperature display button
- Core probe heater button
- HACCP alarm display button
- Pre-cooling cycle button
- Adjustable evaporator fan speed button
- Timed manual defrost button
- USB data recorder
- Infinity mode program with adjustable set point
- Automatic conservation mode at end of cycle
- On board recipe book with 68 pre-set programs
- 99 Free memory positions for custom programs
- LCD illuminated temperature display
- Real time clock
- One, high precision heated multi sensor probe
- Maximum interior dimensions for carts: 30"W x 83"D x 75"H (not included)
- Ramp dimension: 39.2"W x 31.9"D (ramp not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- UV sterilization lamp (must be added at time of order)
- Single sensor probes (up to 4 possible)
- Change door swing
- Ramp (not included)

REFRIGERATION SYSTEM

- Remote refrigeration system uses R404 refrigerant (condensing unit to be provided by others)
- Evaporator fitted with a high flow rate fan insures maximum cooling efficiency
- Indirect air flow assures highest product quality
- Manual defrosting with door open on a timed cycle
- Blast chilling (194°F to 37°F in 90 minutes) or shock freezing (194°F to 0°F in 240 minutes) cycles

BF402DP BLAST CHILLER/SHOCK ROLL-IN FREEZER



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com




BEVERAGE-AIR®

Remote Blast Chiller/Shock Roll-In Freezer Model: BF402DP-1P


| MODEL | BF402DP-1P |
|---------------------------------------|----------------|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall (in) | 59.06" |
| Depth Overall (in) | 93.50" |
| Height Overall (in) | 87.80" |
| Number of Doors | 1 |
| Width, Door Opening (in) | 125.20" |
| Door Opening (in) | 31.5" x 75.59" |
| PERFORMANCE DATA | |
| Sheet Pan Capacity* (18" x 26") | 40 |
| Steam Table Pan Capacity* (12" x 20") | 80 |
| Chilling Capacity In 90 Min | 660 lbs |
| Freezing Capacity In 240 Min | 440 lbs |
| Climate Class | 5 |
| Capacity Mobile Cart(s) | 2 GN 2/1 |
| ELECTRICAL DATA | |
| Cabinet Voltage | 208-240/60/3 |
| Total Amperes | 17.0 |
| NEMA Plug | N.A. |
| REFRIGERATION DATA | |
| Condensing Unit Size, HP | N.A. |
| Refrigerant | R404 |
| Capacity (BTU/Hr) (113°F/-13°F) | 54,898 |
| Heat Rejection (W) (14°F/95°F) | N.A. |
| Refrigerant Amount (lbs) | N.A. |
| WEIGHT DATA | |
| Gross Weight - Crated | 1676 lbs |
| Height - Crated | (2) 89" |
| Width - Crated | (2) 55" |
| Depth - Crated | (2) 70" |

*Note - Pans not included


Model Views

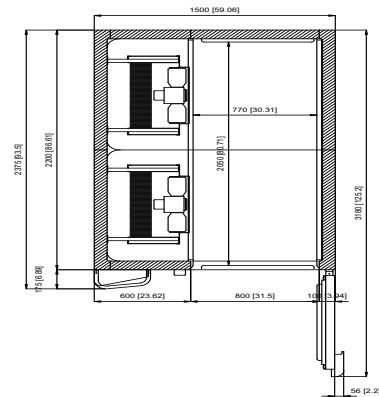

PLAN VIEW

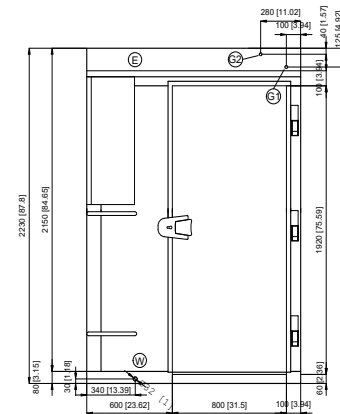

ELEVATION VIEW

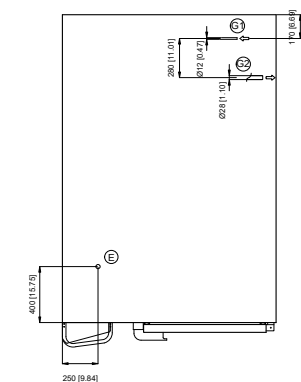

SIDE VIEW

