

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## **DELI/BAKERY CASE**

CDR3HC Deli/Bakery Case Refrigerator Hydrocarbon Series

MODEL: CDR3HC-1-B



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

### **CABINET CONSTRUCTION**

- Exterior has black powder coated galvanized steel
- Stainless steel interior with mirrored end caps
- Sliding glass, removable doors
- Curved front glass
- Full electronic control with various set points
- · LED lighting with on and off switch
- Electrical outlet for scale
- · Adjustable shelves for better product display
- Price tag molding standard
- Open food rated

### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Dry case (add -D to refrigerated models)
- 3" Casters
- 6" Casters
- 2 3/4" Casters

### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Hot gas condensate evaporator
- Hot gas defrost system
- Maintenance free condenser
- Refrigerator maintains product temperatures between 33°F to 41°F
- · Direct sunlight should be avoided
- Tested to 75°F and 55% relative humidity








MODEL	CDR3HC-1-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	37 1/4"	
Depth Overall	35 <sup>47</sup> / <sub>64</sub> "	
Height Overall	48 %16"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	10	
Internal Width Overall (in)	33 7/16"	
Internal Depth Top & Middle Overall (in)	15 ¹½₀°	
Internal Depth Overall Bottom (in)	24 ³½/100"	
Internal Height Overall (in)	38 <sup>43</sup> / <sub>64</sub> "	
Number of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	4.0	
REFRIGERATION DATA		
Horsepower	1/6	
Energy Consumption	4.4 kw-hr/24 hrs	
Capacity (BTU/Hr)	1180	
Heat Rejection (BTU/Hr)	1770	
Charge (lbs/grams)	0.176/80	
SHIPPING DATA		
Gross Weight	448 lbs	
Height - Crated	58"	
Width - Crated	40"	
Depth - Crated	43"	

# Deli/Bakery Case Refrigerator

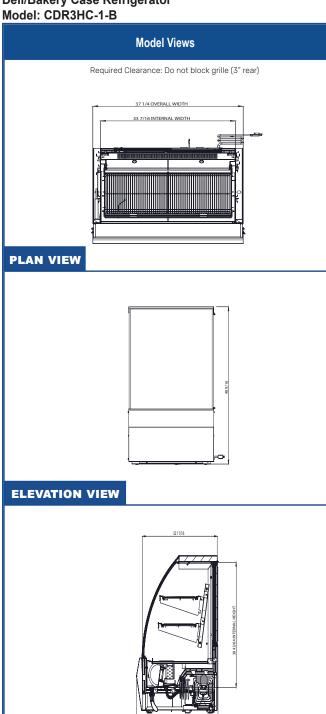



### **ELECTRICAL CONNECTION**



SIDE VIEW

120/60/1 **NEMA 5-15P**  Units pre-wired at factory and include 8' long cord and plug set.