


## CL 60 WORKSTATION - Complete Veg'Prep Solution




<b>D</b>	<b>Number of meals per service</b>	<b>300 to 3000</b>
	<b>Theoretical output per hour*</b>	<b>3970 lbs</b>


### FEED HEADS

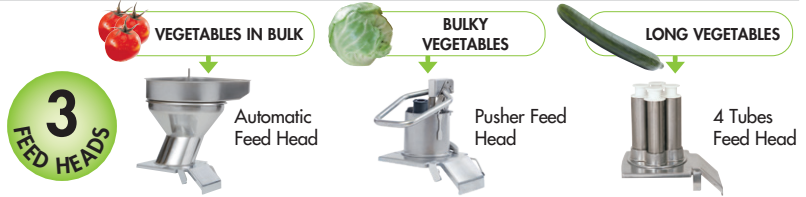

### DISCS

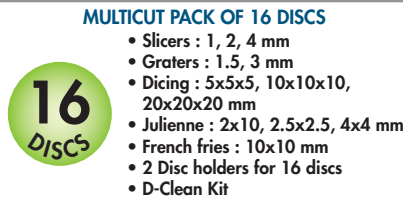

### POTATO RICER EQUIPMENT

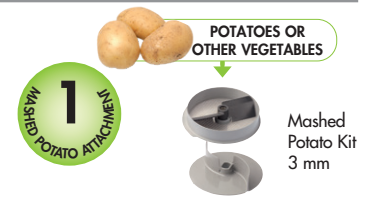

### A SALES FEATURES

CL 60 Workstation is a All in One Veg'Prep Solution. It is ideal for slicing, ripple cutting, grating, dicing, shredding and making french fries from all types of fruit and vegetables, as well as grating cheese. Can process very large quantities of produce with 52 different cuts and equipped to produce mashed potato.

### B TECHNICAL FEATURES

The CL 60 Workstation – Three-phase. Power – 3HP. 2 speeds 425 and 850 rpm. Magnetic safety system, motor brake. This metal Vegetable Preparation Machine has a lateral ejection facility and is equipped with **3 Feed Heads**: 1 Automatic stainless steel Feed Head with feeding tray; 1 Pusher Feed Head, XL full moon hopper, diameter: diameter 7"; loading volume - 4.2 litres, and integrated tube Ø 2 1/4" and/or Ø 1,5"; 4 Tubes Feed Head with 2 heads: 2" & 2 heads: 2.8"; **1 Mashed Potato Attachment**; **1 Ergo Mobile Cart** with 3 GN 1/1 pans; **MultiCut Pack of 16 discs**: 3 slicers - (0.8mm) 1/32", (2mm) 5/64" & (5mm) 3/16"; 2 graters - (2mm) 5/64" & (5mm) 3/16"; 3 dicing - (5x5x5mm) 3/16", (10x10x10mm) 3/8" & (14x14x5mm) 9/16"x9/16"x3/16"; and 2 Julienne sticks - (2.5 x 2.5mm) 1/10"x1/10" & (2 x 10mm) 5/64"x3/8". **Dice Cleaning Kit**, cleaning tool for dicing grids and **2 disc holders**; **Storage cart**. Stainless steel motor unit and vegetable chute. Vegetable Preparation Machine equipped with 2 wheels and a handle. Suitable for up to 3,000 covers per sitting. Additional discs available from the complete collection of 52 discs.

Select your options at the back page, **F** part.

### C TECHNICAL DATA

<b>Output power</b>	3HP
<b>Electrical data</b>	Three phase - 8.3 Amp
<b>Speeds</b>	425 and 850 rpm
<b>Dimensions (HxLxW)</b>	18" x 30" x 53"
<b>Rate of recyclability</b>	95%
<b>Net weight</b>	201 lbs
<b>Nema #</b>	L15 - 20P
<b>Reference</b>	CL60 Workstation Series E 208-240V/60/3

### E PRODUCT FEATURES / BENEFITS

#### MOTOR BASE

- Industrial induction motor for intensive use.
- Power - 3HP
- Stainless steel motor base and shaft.
- Magnetic safety system with motor brake and lever-activated auto restart.
- 2 Speeds 425 and 850 rpm

#### VEGETABLE PREPARATION FUNCTION

- Vegetable Preparation Machine equipped with
  - > 3 Feed Heads:
    - Automatic stainless steel Feed Head with feed tray for continuous input of large quantities of all vegetables in bulk;
    - Pusher Feed Head, with its XL full-moon hopper which can accommodate a whole cabbage or up to 15 tomatoes. Equipped with an integrated tube for long, delicate produce. Exactitude pusher: reduction of tube diameter to cut up small ingredients. The lever-assisted hopper requires less effort from the operator and increases the output. Handle is height adjustable to 3 positions for optimum operator comfort.
    - 4 Tubes Feed Head ensures a uniform cut specifically for long produce.
  - > Mashed Potato Attachment (grid + special puree evacuation disc) guaranteeing volume and rapidity;
  - > Ergo Mobile Cart (comes with 3 pans) with an upper shelf for easy loading and a rotation system allowing a full tray to be replaced by an empty tray without having to lift either one. Cart is equipped with 4 rotating wheels, 2 fitted with brakes.
  - > MultiCut pack of 16 discs to give full rein to creativity in the preparation of original, appetizing cuts.
  - > Dice Cleaning Kit: cleaning tool for dicing grids
  - > 2 disc holders
  - > Storage cart: to store and transport all Workstation accessories: feed heads and discs.
- Tilting of the feed heads in line with the motor base for space-saving.
- Optimum size and height. CL60 is equipped with 2 wheels and a handle, guaranteeing very easy movement.
- Reversible discharge plate for processing delicate produce.
- Lateral ejection facility for greater user comfort.
- Large choice of 52 discs as available.
- Stainless steel blades on slicing discs, blades on Julienne discs and grating discs are removable.

#### STANDARDS

ETL electrical and sanitation Listed/ cETL (Canada)



\* Results may differ depending on the type of the hopper used, the choice of the cut and the setup of the workstation.

Specification sheet

[www.robot-coupe.com](http://www.robot-coupe.com)

Update : April 2021

Robot Coupe USA, Inc.

264 South Perkins - Ridgeland, MS 39157

PH: 601-898-8411 - Toll free: 800-824-1646 - Fax: 601-898-9134

info@robotcoupeusa.com

## CL 60 WORKSTATION - Complete Veg'Prep Solution

### OPTIONAL DISCS



SLICING	
0.6 mm	28166
0.8 mm	28069
1 mm (1/32")	28062
2 mm (5/64")	28063
3 mm (1/8")	28064
4 mm (5/32")	28004
5 mm (3/16")	28065
6 mm (1/4")	28196
8 mm (5/16")	28066
10 mm (3/8")	28067
14 mm (9/16")	28068
20 mm (25/32")	28132
25 mm (1")	28133
cooked potatoes 4 mm (5/32")	27244
cooked potatoes 6 mm (1/4")	27245



RIPPLE CUTTING	
2 mm (5/64")	27068
3 mm (1/8")	27069
5 mm (3/16")	27070



GRATERS	
1.5 mm (1/16")	28056
2 mm (5/64")	28057
3 mm (1/8")	28058
4 mm (5/32")	28136
5 mm (3/16")	28163
7 mm (9/32")	28164
9 mm (11/32")	28165
Röstis potatoes	27164
Raw potatoes	27219
Fine Pulping disc	28055
Hard Cheese grate	28061



JULIENNE	
1x8 mm tagliatelle (1/32"x5/16")	28172
1x26 onion/cabbage (1/32"x1 1/4")	28153
2x2 mm (5/64" x 5/64")	28051
2x4 mm (5/64" x 5/32")	27072
2x6 mm (5/64" x 1/4")	27066
2x8 mm (5/64" x 5/16")	27067
2x10 tagliatelle (5/64"x3/8")	28173
2.5x2.5 mm (1/10" x 1/10")	28195
3x3 mm (1/8" x 1/8")	28101
4x4 mm (5/32" x 5/32")	28052
6x6 mm (1/4" x 1/4")	28053
8x8 mm (5/16" x 5/16")	28054



DICING EQUIPMENT	
5x5 mm (3/16")	28110
8x8 mm (5/16")	28111
10x10 mm (3/8")	28112
12x12 mm (15/32")	28197
14x14x5 mm Mozzarella (9/16"x9/16"x3/16")	28181
14x14x10mm (9/16"x9/16"x3/8")	28179
14x14 mm (9/16")	28113
20x20 mm (25/32")	28114
25x25 mm (1")	28115
2" Lettuce Cut	28180



FRENCH FRY EQUIPMENT	
8x8 mm (5/16" x 5/16")	28134
8x16 mm (5/16" x 5/8")	28159
10x10 mm (3/8" x 3/8")	28135
10x16 mm (3/8" x 5/8")	28158

### G

### ELECTRICAL DATA

208-240V/60/3 - delivered with cord and plug.

