


| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

MODEL: DD68HC-1-C-B

DD68HC Solid Door Club Top Dual Towers With Single Faucets Hydrocarbon Series





CABINET CONSTRUCTION

- Exterior features durable black painted steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor and doorsill are heavy-duty stainless steel
- Club top, easy glide stainless steel lids for additional storage of glasses, cans or bottles, includes (1) epoxy coated shelf and (1) basket
- Full electronic control
- Dual tower with single faucets
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing doors with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible doors (hinge kit not included)
- Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel interior lining
- · Stainless steel back
- Glass door
- Shelves
- Shelf clips
- Wine/coffee models
- Faucet locks
- Glass rinser
- Right or left hinged door
- 2"- 3" Casters or 6" black legs
- No draft/hole cover option
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




| MODEL | DD68HC-1-C-B | |
|--------------------------------------|---------------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 69" | |
| Depth Overall | 29 1/16" | |
| Height Overall (floor to top of tap) | 52 %" | |
| Number of Doors | 2 | |
| Depth with Door Open 90° | 50 1/16" | |
| Door Openings (in) | 21" x 30" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 25.93 | |
| Internal Width Useable (in) | 56" | |
| Internal Depth Overall (in) | 23 1/8" | |
| Internal Height Overall (in) | 27 %" | |
| Number of 1/2 Kegs | 3 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 5.5 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/3 | |
| Capacity (BTU/Hr) | 2392 | |
| Heat Rejection (BTU/Hr) | 3588 | |
| Charge (lbs/grams/ounces) | 0.2535 / 115 / 4.06 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 400 lbs | |
| Height - Crated | 46" | |
| Width - Crated | 72" | |
| Depth - Crated | 32" | |

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Bar Equipment-Direct Draw Dispenser Club Top Model: DD68HC-1-C-B

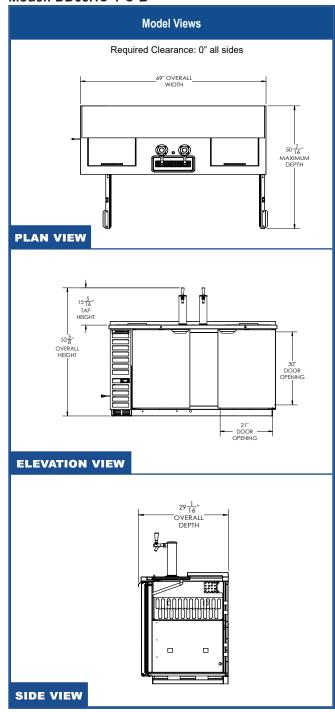







115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.