BEVERAGE-AIR

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

MODEL:

HBRF23HC-1-A

DUAL TEMPERATURE REFRIGERATOR/FREEZER HBRF23HC Half-Solid Door Bottom Mount Reach-In

Hydrocarbon Series



5 Year Parts/Labor Warranty Available

7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, side, and grille (galvanized back & bottom)
- Stainless steel interior
- Full electronic control with one-touch defrost
- Dual temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Refrigerator is the top section
- Freezer is the bottom section
- One-piece grille allows easy removal/installation for preventative maintenance
- Door locks
- Self closing doors, 120° stay open feature with spring-loaded style hinges
- Snap-in magnetic door gaskets for easy cleaning and replacement
- Four (4) heavy-duty epoxy coated wire shelves
- LED lighting standard
- 6" Heavy-duty casters with (2) brakes
- Certified for open food product

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Epoxy shelves
- Shelf clips
- 3" Casters or 6" legs
- Wine temperature control
- Door swing orientation (at time of order)
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- \bullet Refrigerator maintains product temperatures between 36°F to 38°F
- Freezer maintains product temperature to -10°F





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	HBRF23HC-1-A	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 ¼"	
Depth Overall (with handles)	33 ¾"	
Height Overall (with casters)	84"	
Number of Doors	2	
Depth with Door Open 90°	57 3⁄ 8"	
Door Openings (in)	24 ¼" x 24 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	(R) 8.65 (F) 11.50	
Internal Width Overall (in)	24 ¼"	
Internal Depth Overall (in)	28 ¼"	
Internal Height Top Usable (in) (R)	26 7/8"	
Internal Height Bottom Usable (in) (F)	17 7⁄8"	
Number of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes	(R) 2.0 (F) 4.0	
REFRIGERATION DATA		
Horsepower	(R) 1/10 (F) 1/2	
Capacity (BTU/Hr)	(R) 1110 (F) 1513	
Heat Rejection (BTU/Hr)	3934.5	
Charge (lbs/grams/ounce)	(R) 0.992 / 45 / 1.59 (F) 0.1213 / 55 / 1.94	
SHIPPING DATA		
Gross Weight - Crated	446 lbs	
Height - Crated	87"	
Width - Crated	29"	
Depth - Crated	38"	

*NOTE: Remote units are field wired and come with 6" legs.

Refrigerant must be specified at time of order.

Dual Temp Bottom Mount Reach-In Half-Solid Door Refrigerator/Freezer Model: HBRF23HC-1-A

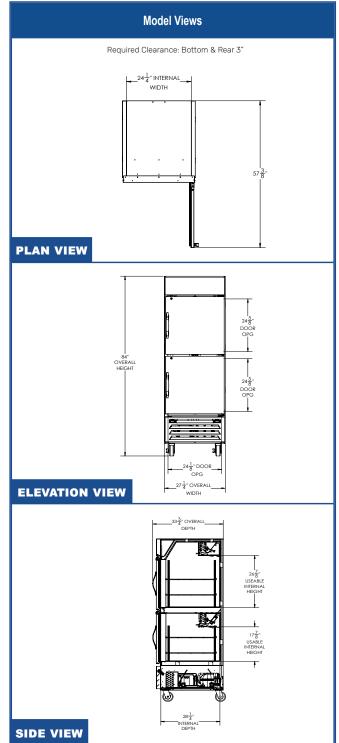



ELECTRICAL CONNECTION

115/60/1 (2) NEMA 5-15P (2) NEMA 5-15P (2) NEMA 5-15P (2) Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Company

