

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

# MARKETEER™ MERCHANDISERS

MT53 White Hinged Door Model Hydrocarbon Series MODEL: MT53-1W



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Standard cabinet exterior finish is heavy duty steel with a white baked on durable coating
- Heavy duty interior construction includes white coated steel
- Mechanical temperature control
- Modern one piece grille
- Double pane lowE argon filled glass doors feature outside pane that is tempered for added safety
- Door locks standard
- · Self-closing hinged glass doors features, pocket door handles
- LED lighting
- Ten (10) epoxy coated shelves
- · Leveling feet

### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Extra shelves and clips
- 3" Casters
- · Visislide shelving kit

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Condenser is designed to be low maintenance, and energy efficient
- Automatic, non-electric defrost
- Epoxy coated evaporator coil








MODEL	MT53-1W	
EXTERNAL DIMENSIONAL DATA		
Width Overall	54 ½"	
Depth Overall	29 1/8"	
Height Overall	78 %"	
Number of Doors	2	
Depth with Door Open 90°	54"	
Door Openings	22 ¾" x 59 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	41.66	
Capacity 20 oz	480	
Internal Width Overall (in)	50"	
Internal Depth Overall (in)	20 7/8"	
Internal Height Overall (in)	59 <sup>11</sup> / <sub>16</sub> "	
Internal Height Useable (in)	54"	
Number of Shelves	10	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	8.7	
REFRIGERATION DATA		
Horsepower	1/2+	
Energy Consumption	3.290 kWh/day	
Capacity (BTU/Hr)	4201	
Heat Rejection (BTU/Hr)	6301.5	
Charge (lbs/grams/ounces)	0.2094 / 95 / 3.35	
WEIGHT DATA		
Gross Weight - Crated	538 lbs	
Height - Crated	85"	
Width - Crated	57"	
Depth - Crated	33"	

## Glass Hinged Door Model Model: MT53-1W

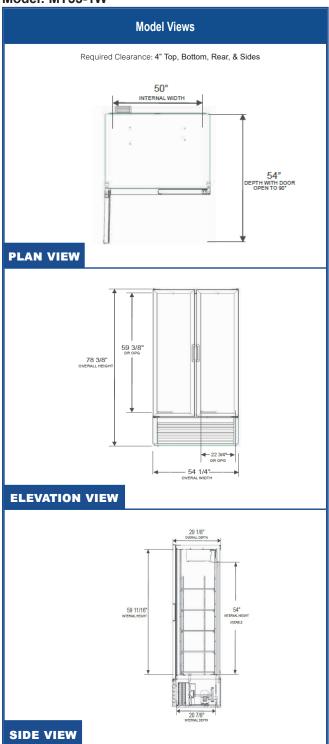



## **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord and plug set.