

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P SERIES TOP MOUNT FREEZER

PF1HC Half-Solid Door Reach-In Hydrocarbon Series

MODEL: PF1HC-1AHS



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom & back)
- · Interior is made of corrosion resistant aluminum
- · Stainless steel door liner
- · Full electronic control
- · Expansion valve technology
- Self-closing doors with 120° stay-open feature
- 22 Gauge stainless steel half door
- · LED interior light
- Cylinder locks
- · Snap-in magnetic gaskets for positive door seal
- · Hinged front shroud
- · Energy saving thermal breaker
- · Stainless steel breaker caps
- Three (3) heavy-duty epoxy wire coated shelves
- · 6" High adjustable stainless steel legs
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel case back
- · Stainless steel interior
- · Additional shelves
- 3" or 6" casters
- · 6" Seismic legs
- Tray slides (type A & A/C)
- · Door swing orientation (at time of order)
- Remote option* (see note back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Freezer capable of maintaining product temperature down to -10°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	PF1HC-1AHS	
EXTERNAL DIMENSIONAL DATA		
Width Overall	26 ½"	
Depth Overall with Handles	34 ¾"	
Height Overall	84 ½"	
Number of Doors	2	
Depth with Door Open 90°	56 ¾"	
Door Openings (in)	21 ½" x 25 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	21.01	
Internal Width Overall (in)	22 ½"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	56 %"	
No. of Shelves	3	
ELECTRICAL DATA		
Full Load Amperes 115/60/1**	9.1	
REFRIGERATION DATA		
Horsepower	3/4	
Capacity (BTU/Hr)	2450	
Heat Rejection (BTU/Hr)	3675	
Charge (lbs/grams/ounces)	0.2866 / 130 / 4.59	
SHIPPING DATA		
Gross Weight (crated lbs)	390 lbs	
Height - Crated	87"	
Width - Crated	45"	
Depth - Crated	35"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

P Series Top Mount Freezer Model: PF1HC-1AHS

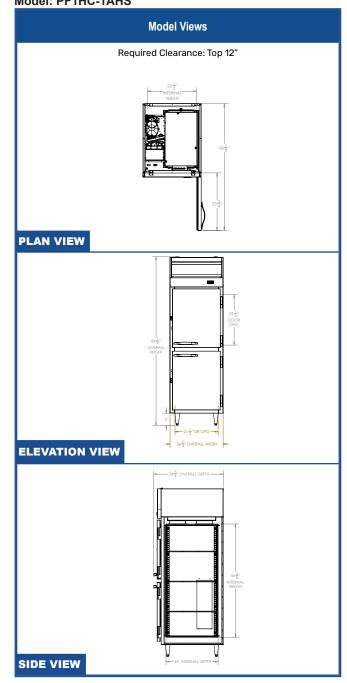

ELECTRICAL CONNECTION



115/60/1** Unit pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.

** NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.









