

Project:	AIA#
Item:	
Location:	. SIS#
Approved:	

P-SERIES TOP MOUNT ROLL-IN REFRIGERATOR

PRI1HC Solid Door Refrigerator Hydrocarbon Series MODEL: PRI1HC-1AS



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front and side exterior (galvanized rear, back & bottom)
- · Interior is made of corrosion resistant aluminum
- · Stainless steel door liner
- · Full electronic control
- Expansion valve technology
- · Variable speed compressor technology
- Self-closing door with 120° stay-open feature
- · 22 Gauge stainless steel door
- · LED interior light
- · Heavy-duty cylinder lock
- Snap-in magnetic gaskets for positive door seal
- · Hinged front shroud
- Reinforced stainless steel door ramps outside and cart guides inside
- Accepts cart up to 26 3/8" (W) x 26" (D) x 64 1/2" (H) (cart not included)
- Wiper gasket at bottom of door seals door to ramp
- · Energy saving thermal breaker
- Stainless steel breaker caps
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- · Stainless steel interior
- Stainless steel case back
- Door swing orientation (at time of order)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil, located out of the food zone
- Refrigerator capable of maintaining product temperature 36°F to 38°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	PRI1HC-1AS
EXTERNAL DIMENSIONAL DATA	
Width Overall	36 ½"
Depth Overall with Handle	36 1/8"
Height Overall	84 ³ / ₈ "
Between Cart Guides	26 ¾"
Number of Doors	1
Depth with Door Open 90°	65 ¾"
Door Openings (in)	27 %" x 65 %"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	34.86
Internal Width Overall (in)	31 ¼"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	66 1/4"
ELECTRICAL DATA	
Full Load Amperes 115/60/1*	6.5
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)	2800
Heat Rejection (BTU/Hr)	4200
Charge (lbs/grams/ounces)	0.3307 / 150 / 5.29
SHIPPING DATA	
Gross Weight - Crated	432 lbs
Height - Crated	88"
Width - Crated	45"
Depth - Crated	45"

P Series Top Mount Roll-In Refrigerator Model: PRI1HC-1AS

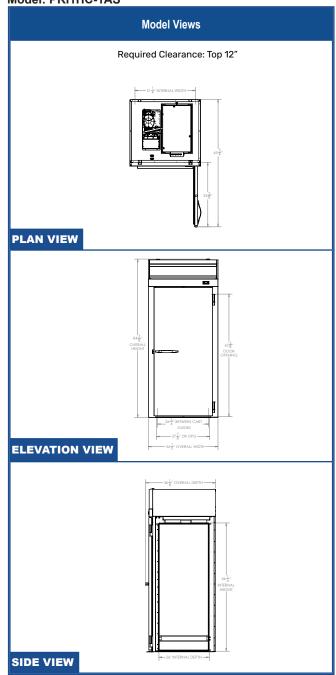

ELECTRICAL CONNECTION



115/60/1*

Unit pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.

* NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.









