



# BEVERAGE-AIR®

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

**SR1HC BOTTOM MOUNT REACH-IN: SLATE SERIES**

## SLATE REACH-IN REFRIGERATOR

SR1HC Solid Door Bottom Mount  
Hydrocarbon Series

**MODEL:  
SR1HC-1S**



**4 Year Parts/Labor Warranty Available  
7 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Stainless steel door and grille with modern slate finish sides
- Interior features easy to clean white coated steel walls with slate finish interior door
- Mechanical temperature control
- LED lighting standard
- Three (3) adjustable epoxy shelves
- Door lock standard
- 6" Casters standard

### OPTIONS & ACCESSORIES

- 2 Year parts/labor standard, additional 2 year warranty available
- Additional shelves

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Refrigerator capable of maintaining product temperature between 36°F to 38°F



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com




# BEVERAGE-AIR

MODEL	SR1HC-1S
<b>EXTERNAL DIMENSIONAL DATA</b>	
Width Overall	30 1/16"
Depth Overall	33 15/32"
Height Overall	85 41/64"
Number of Doors	1
Depth with Door Open 90°	59 59/64"
Door Opening (in)	26 11/32" x 53 1/2"
<b>INTERNAL DIMENSIONAL DATA</b>	
NET Capacity (cubic ft.)	23
Internal Width Overall (in)	26 1/2"
Internal Depth Overall (in)	24 21/32"
Internal Height Overall (in)	61 21/32"
Number of Shelves	3
<b>ELECTRICAL DATA</b>	
Full Load Amperes	5.0
<b>REFRIGERATION DATA</b>	
Horsepower	1/5
Capacity (BTU/Hr)	1730
Heat Rejection (BTU/Hr)	2595
Charge (lbs/grams)	0.176/80
<b>SHIPPING DATA</b>	
Gross Weight - Crated	260 lbs
Height - Crated	84"
Width - Crated	32"
Depth - Crated	36"


## Bottom Mount Reach-In Solid Door Refrigerator Model: SR1HC-1S

### Model Views


Required Clearance: Top 12", Rear 4"



### PLAN VIEW

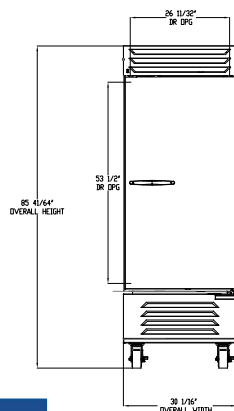

### ELEVATION VIEW

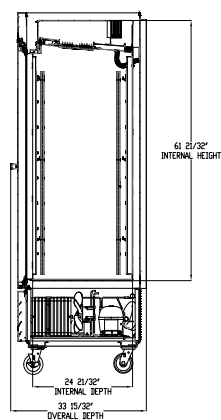

### SIDE VIEW



### ELECTRICAL CONNECTION



120/60/1  
NEMA 5-15P

Units pre-wired at factory and include 7' long cord and plug set.