

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

WORKTOP REFRIGERATOR

WTR60AHC Solid Door With Flat Top Hydrocarbon Series

MODEL: WTR60AHC-FLT



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, doors and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- Flat top
- Full electronic control
- · Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Four (4) epoxy-coated steel wire shelves
- Field-reversible doors (hinge kit not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Glass door option
- · Right or left hinged door
- Locks (solid doors only)
- · Wire shelf divider
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- · Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	WTR60AHC-FLT	
EXTERNAL DIMENSIONAL DATA		
Width Overall	60"	
Depth Overall with Handle & Bumper	32"	
Height Overall with 6" Casters	35 %"	
Number of Doors	2	
Depth with Door Open 90°	55 1⁄4"	
Door Openings	22 %" x 21 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	14.75	
Internal Width Overall (in)	56"	
Internal Depth Overall (in)	15 ¾"	
Internal Height Overall (in)	23"	
Number of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes	3.0	
REFRIGERATION DATA		
Horsepower	1/5	
Capacity (BTU/Hr)	1350	
Heat Rejection (BTU/Hr)	2025	
Charge (lbs/grams/ounces)	0.2425 / 110 / 3.9	
SHIPPING DATA		
Gross Weight - Crated	300 lbs	
Height - Crated	35"	
Width - Crated	62"	
Depth - Crated	33"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Worktop Refrigerator Model: WTR60AHC-FLT

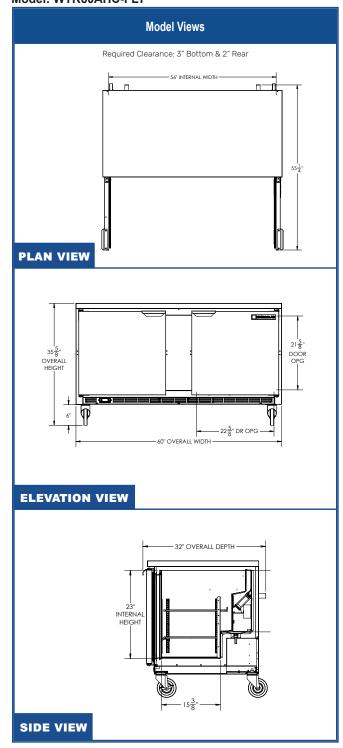



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.