

| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

BAR EQUIPMENT - BAR MOBILE DZ24 Solid Door Dual Zone

MODEL: DZ24-1-B



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Interior is galvanized steel with reinforced stainless steel floor
- Stainless steel top with black glass rails
- Stainless steel drip tray for easy cleaning
- Full electronic control
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- Dual zone models feature 2 independent compartments that allow independent temperature in each section
- Unit has a minimum variance of +/-15°F, and maximum of 20°F depending on condition
- 100% portable with waste bottle to capture beer/wine from drain
- Magnetic gasket provides positive door sealing
- · Self-closing door with lock standard
- 3" Insulated tower with dual faucet, standard
- Holds up to (4) 1/6 kegs in each section
- Four-inch (4") deavy duty casters with two (2) brakes

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- · Stainless steel interior
- Tap Locks
- 1- 4 Tap insulated stainless towers/taps
- No draft arm with hole cover

REFRIGERATION SYSTEM

- Refrigeration system uses R134a refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Left hand compartment maintains 32°-40°F, Right hand maintains 50°-65°F












| MODEL | DZ24-1-B | |
|----------------------------------|---------------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 24" | |
| Depth Overall (with handle) | 29 %" | |
| Height Overall (with casters) | 53" | |
| Number of Doors | 1 | |
| Depth with Door Open 90° | 50 %" | |
| Door Openings (in) | 20" x 27 ¾" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity Freezer (cubic ft.) | (L) 3.72, (R) 3.72 | |
| Internal Width Overall (in) | 10" | |
| Internal Depth Overall (in) | 18 ⅓ " | |
| Internal Max Height Overall (in) | 29 ½" | |
| Number of Straight Wall Kegs | 4 (1/6) | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 4 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/5 | |
| Capacity (BTU/Hr) | 1110 | |
| Heat Rejection (BTU/Hr) | 1665 | |
| Charge (lbs/grams/ounces) | 0.2976 / 135 / 4.75 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 220 lbs | |
| Height - Crated | 46" | |
| Width - Crated | 27" | |
| Depth - Crated | 31" | |

Bar Equipment - Dual Zone Bar mobile Model: DZ24-1-B

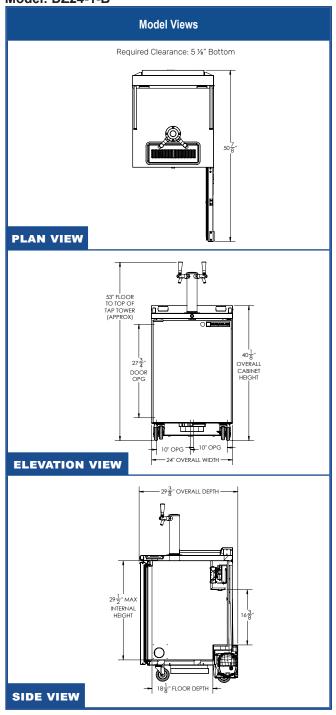



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.