

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

DUAL TEMP UNDERCOUNTER

UCRF48AHC Undercounter Refrigerator/Freezer Hydrocarbon Series

MODEL: UCRF48AHC

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel front, sides, doors, and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Dual Temp: left side refrigerator, right side freezer unit provide two different operating temperature zones for different types of products
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Internal thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handles
- 6" Casters, two (2) with brakes standard
- Four (4) epoxy-coated steel wire shelves
- Field reversible doors (hinge kit not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- · Stainless steel back
- · Stainless steel interior
- Right or left hinged door
- Locks (solid doors only)
- Bun rack
- · Wire shelf divider
- 3" Casters or 6" legs
- Low profile casters
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Freezer has an electric defrost, refrigerator has a non-electric defrost
- Refrigerator maintains product temperatures between 36°F and 38°F
- Freezer maintains product temperature from -10°F and below






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	UCRF48AHC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	48"	
Depth Overall (with handle & bumper)	32"	
Height Overall (with casters)	34 ½"	
Number of Doors	2	
Depth with Door Open 90°	52 1⁄4"	
Door Openings (in)	19 ½" x 21 ⁵⁄8"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	(R) 5.31 (F) 5.31	
Internal Width Overall (in)	(2) 21"	
Internal Depth Overall (in)	15 ¾"	
Internal Height Overall (in)	23"	
Number of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes	(R) 2.0 (F) 2.5	
REFRIGERATION DATA		
Horsepower	(R) 1/6 (F) 1/4	
Capacity (BTU/Hr)	(R) 1110 (F) 857	
Heat Rejection (BTU/Hr)	2950.5	
Charge (lbs/grams/ounces)	(F) 0.0992 / 45 / 1.59 (R) 0.1323 / 60 / 2.12	
SHIPPING DATA		
Gross Weight - Crated	295 lbs	
Height - Crated	34"	
Width - Crated	52"	
Depth - Crated	32"	

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Dual Temp Undercounter Refrigerator/ Freezer Model: UCRF48AHC

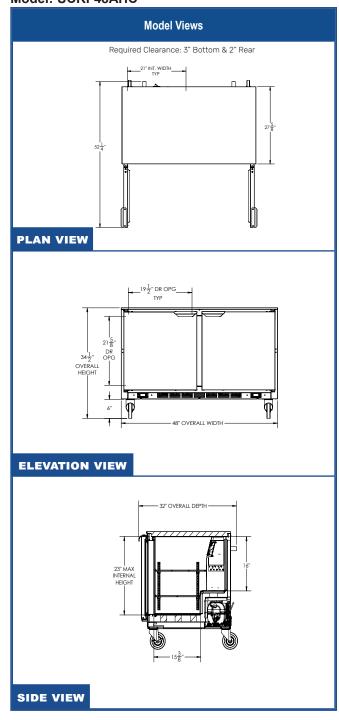



ELECTRICAL CONNECTION



Unit pre-wired at factory 115/60/1 and include (2) 8' long NEMA 5-15P cord and plug set.