	BEVERAGE-AIR.
--	---------------

WORKTOP SIDE MOUNT REFRIGERATOR

WTRD119AHC Solid Door Worktop Refrigerator With Drawers Hydrocarbon Series



CABINET CONSTRUCTION

- Stainless steel front, sides, door and drawers (galvanized back &
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- 16 Gauge stainless steel top
- Full electronic control
- · Interior thermometer is standard
- 4" Foamed-in-place backsplash
- Snap-in drawer gaskets
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket attached to each door for positive seal
- Field-reversible doors
- Six (6) epoxy-coated steel wire shelves
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- · Stainless steel back
- Stainless steel interior
- · Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (solid doors only)
- Bun rack
- Wire shelf divider
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Flat-top with no backsplash (-FLT)
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	WTRD119AHC-2	
EXTERNAL DIMENSIONAL DATA		
Width Overall	118 ½"	
Depth Overall with Handles & Bumper	35 ¾"	
Height Overall with 6" Casters	39 ½"	
Number of Drawers	2	
Drawer Openings	21 %" x 10 %" 21 %" x 10 ¼"	
Depth with Drawer Extended	57 ½"	
Number of Doors	3	
Depth of Door Open 90°	55 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	40.12	
Internal Width Overall (in)	114 1/8"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	25"	
No. of Shelves	6	
ELECTRICAL DATA		
Full Load Amperes	5.0	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2629	
Heat Rejection (BTU/Hr)	3943.5	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9	
SHIPPING DATA		
Gross Weight - Crated	604 lbs	
Height - Crated	48"	
Width - Crated	122"	
Depth - Crated	37"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



c Uus W KCIR AQ W

Worktop Refrigerator - Side Mount Model: WTRD119AHC-2

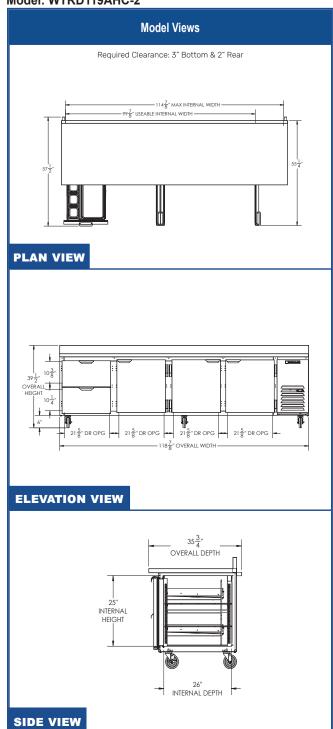

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8 and plug set.