

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

WORKTOP REFRIGERATOR

MODEL: WTRD48AHC-4-FIP

WTRD48AHC Worktop With Drawers & Foamed-In Place Backsplash Hydrocarbon Series

> 5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel front, sides, drawers and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- Foamed-in place backsplash
- Full electronic control
- Interior thermometer is standard
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- · Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	WTRD48AHC-4-FIP	
EXTERNAL DIMENSIONAL DATA		
Width Overall	48"	
Depth Overall with Handle & Bumper	32"	
Height Overall with 6" Casters	39 %"	
Number of Drawers	4	
Depth with Drawer Extended	48"	
Drawer Openings	(4) 19 %" x 9 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	11.82	
Internal Width Overall (in)	44"	
Internal Depth Overall (in)	15 %"	
Internal Height Overall (in)	23"	
ELECTRICAL DATA		
Full Load Amperes	2.2	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1094	
Heat Rejection (BTU/Hr)	1641	
Charge (lbs/grams/ounces)	0.2425 / 110 / 3.9	
SHIPPING DATA		
Gross Weight - Crated	334 lbs	
Height - Crated	35"	
Width - Crated	50"	
Depth - Crated	33"	

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Worktop Refrigerator Model: WTRD48AHC-4-FIP

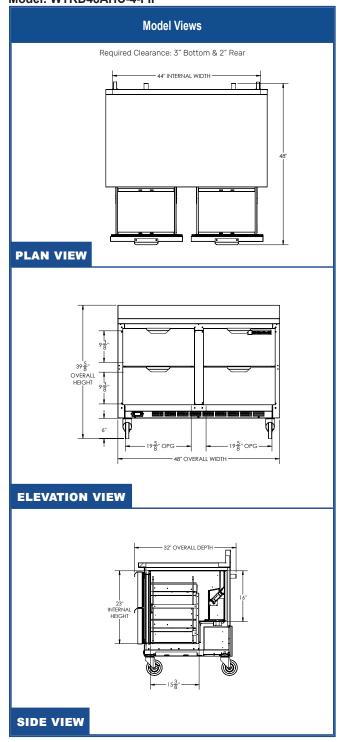

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.

