

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

WORKTOP REFRIGERATOR

WTRD60AHC Flat Top Solid Door Refrigerator With Drawers **Hydrocarbon Series**

> 5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel front, sides, drawers, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- Full electronic control
- Interior thermometer is standard
- Snap-in drawer gaskets
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket attached to each door for positive seal
- Field-reversible door (hinge kit not included)
- Two (2) epoxy-coated steel wire shelves
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- . 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (solid doors only)
- Bun rack
- Wire shelf divider
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F









3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	WTRD60AHC-2-FLT	
EXTERNAL DIMENSIONAL DATA		
Width Overall	60"	
Depth Overall with Handle & Bumper	32"	
Height Overall with 6" Casters	35 %"	
Number of Drawers	2	
Drawer Opening	(2) 22 5/8" x 9 3/8"	
Number of Door	1	
Depth with Door Open 90°	55 1⁄4"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	14.75	
Internal Width Overall (in)	56"	
Internal Depth Overall (in)	15 ¾"	
Internal Height Overall (in)	23"	
No. Of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	3.0	
REFRIGERATION DATA		
Horsepower	1/5	
Capacity (BTU/Hr)	1350	
Heat Rejection (BTU/Hr)	2025	
Charge (lbs/grams/ounces)	0.2425 / 110 / 3.9	
SHIPPING DATA		
Gross Weight - Crated	330 lbs	
Height - Crated	36"	
Width - Crated	62"	
Depth - Crated	33"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Worktop Refrigerator Model: WTRD60AHC-2-FLT

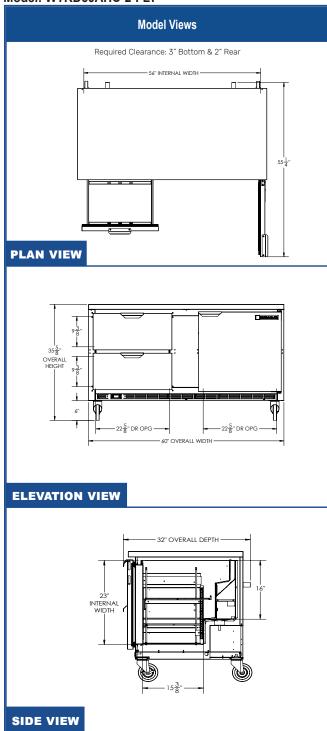

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.

